

## Handheld Drivers

BEFORE connecting the handheld for the first time please ensure the Windows Mobile Device Center has been installed. When the device is connected for the first time the drivers will be downloaded and installed from the web automatically.

## Program Install

This section provides a guide to install the BancTec handheld terminal application for use on Windows devices with Datasym Stockade.

### Download

Download the latest version from the [www.autoidfirst.co.uk/DatasymSupport](http://www.autoidfirst.co.uk/DatasymSupport) page.

### Datalogic Skorpio X3 Extract

Ensure the handheld is connected. Extract the contents of the file and copy the contents (including all subfolders) to the Flashdisk on the handheld.

### Datalogic Skorpio X3 New Set-up

If this is a new installation then switch the device off, remove the battery then depress the Reset Button (in the battery compartment) and the Scan key at the same time. Then reinsert the battery and power the device back on. This will Cold Boot the device and the application will be re-installed.

### Datalogic Skorpio X3 Upgrade

If the device has the application loaded and simply needs an upgrade, then on the handheld open the FlashDisk folder and run the upgrade.bat file.

## MIS Communicator

This section provides a guide to install and set-up the MIS Communicator software used to interface with BancTec Windows handheld terminal applications.

### Download


Download the latest MIS Communicator from the [www.autoidfirst.co.uk/support](http://www.autoidfirst.co.uk/support) page.

### Extract

Extract the zip file to the C:\MIS\ folder


### Set-up

In the C:\MIS\ folder activate the MISCommunicatorInterface.exe application

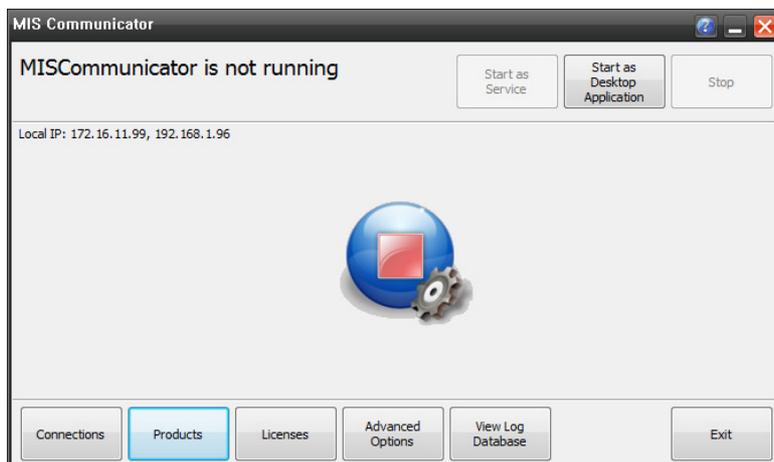

Products

Click the Products button then New

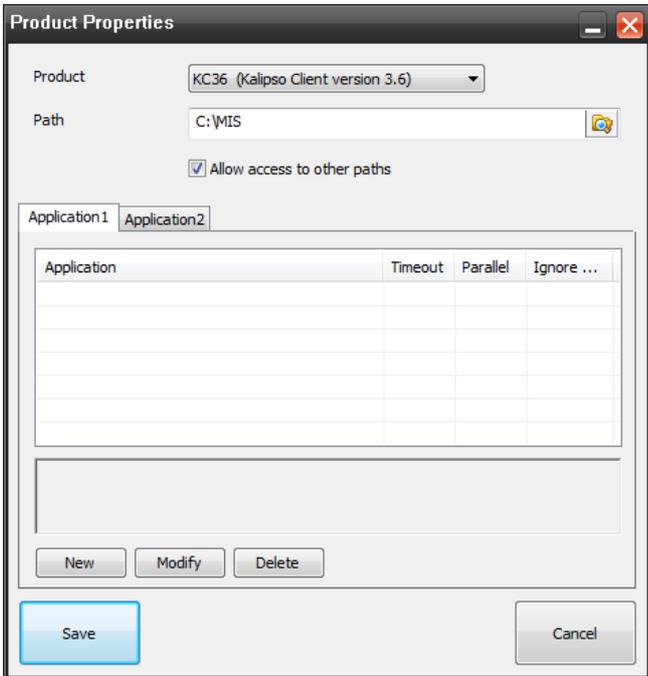


- 1) Select KC36
- 2) Select the MIS folder
- 3) **TICK Allow other paths (IMPORTANT)**

4) Save

Connections

Click the Connections button then New

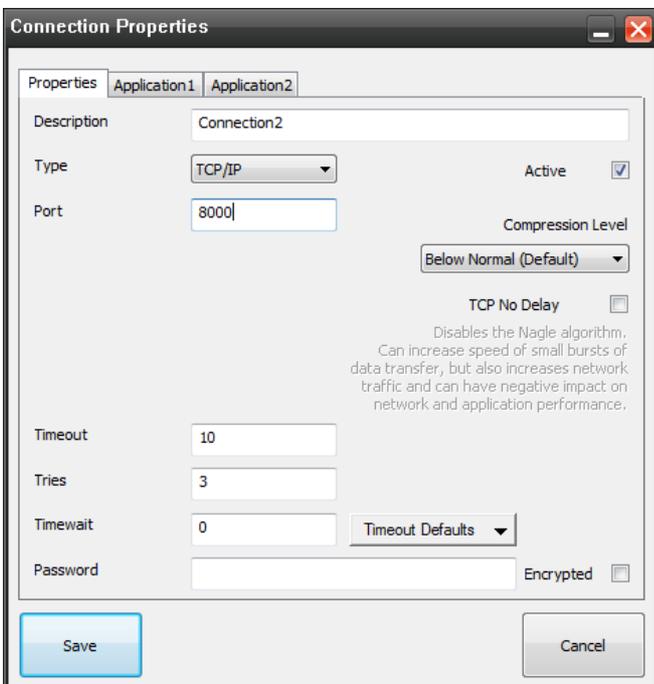


- 1) Enter Connection name
- 2) Enter the port 8000 (unless otherwise instructed, or if port 8000 is already in use)

3) Save

Test Connection

To check the settings are ok click the Start as Desktop application, this should display a screen similar to the following.

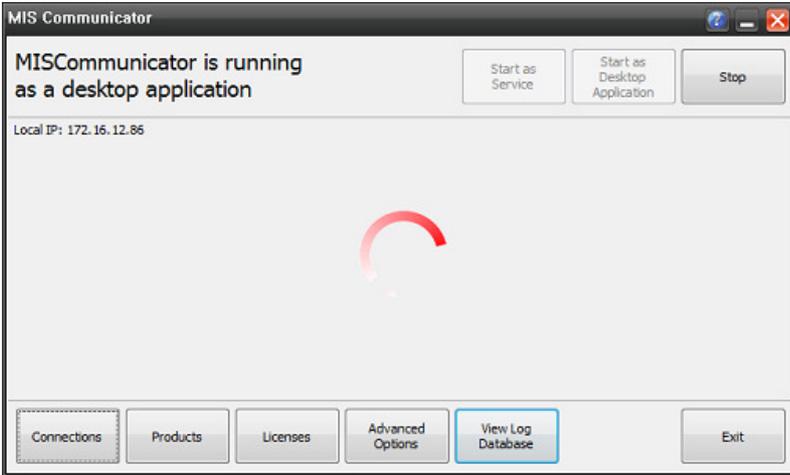

If there are any error messages check that the program is running as “Administrator” and that the port is free. Once working, make a note of the IP Address and Port number used.


Run Time

Once the product and connections has been set-up the MIS Communicator is good to go. The application can be run as a desktop application or as a service from the main window.

**Device Set-up**

This section provides a guide to set-up the device to communicate with the PC.

At the main menu click the “Powered by BancTec..” text to enter the configuration screen. (1) Then select Config Site, (2) Select the site then click Next. (3) Now set the Server IP Address and Port to the ones that worked from above. Click next a few times until the final screen (4) and click Save.

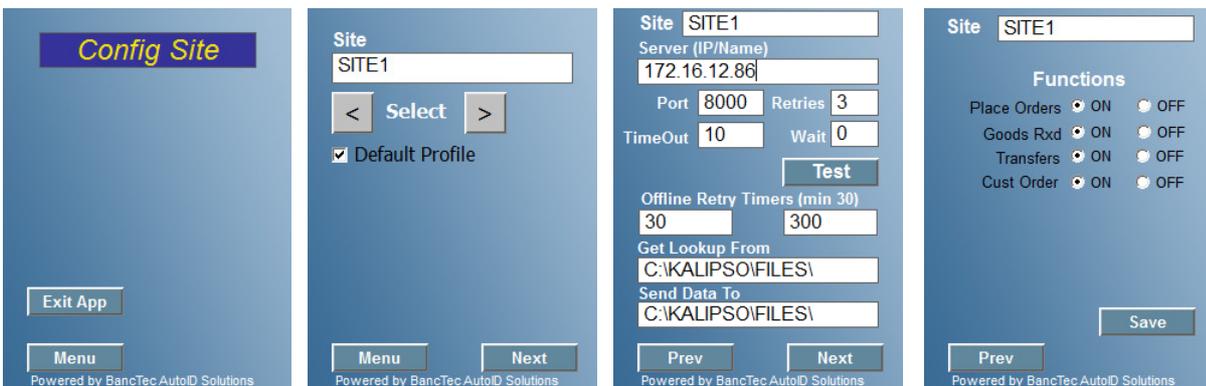

Please ensure that ActiveSync (XP) or Windows Mobile Device Center (Win7) is installed, active and paired with the Windows device.

All trademarks are acknowledged as the properties of their owners.